
pEnCMV-SNX5(human)-3xFLAG

Vector ID	V018490
Accession ID	NM_152227.3
Antibiotic Resistance	Ampicillin
Length	7244 bp
Vector Type	Protein expression
Host	Mammalian cells

Product Information

Replication Origin	ori
Selection Marker	Neo/G418
Copy Number	High copy number
Promoter	CMV
Fusion Tag	3xFLAG
Growth Strain(s)	DH10B
Growth Temperature	37℃
Expression Method	Transient
Comment	pEnCMV-SNX5(human)-3xFLAG is designed for constitutive expression of the human SNX5 gene with a 3xFLAG tag, driven by the CMV promoter. The vector contains WPRE and an HSV TK poly(A) signal, utilizing an SV40 promoter to drive the NeoR/KanR selection marker. It also features an f1 ori, ori, and AmpR for bacterial replication and selection.

Vector Map

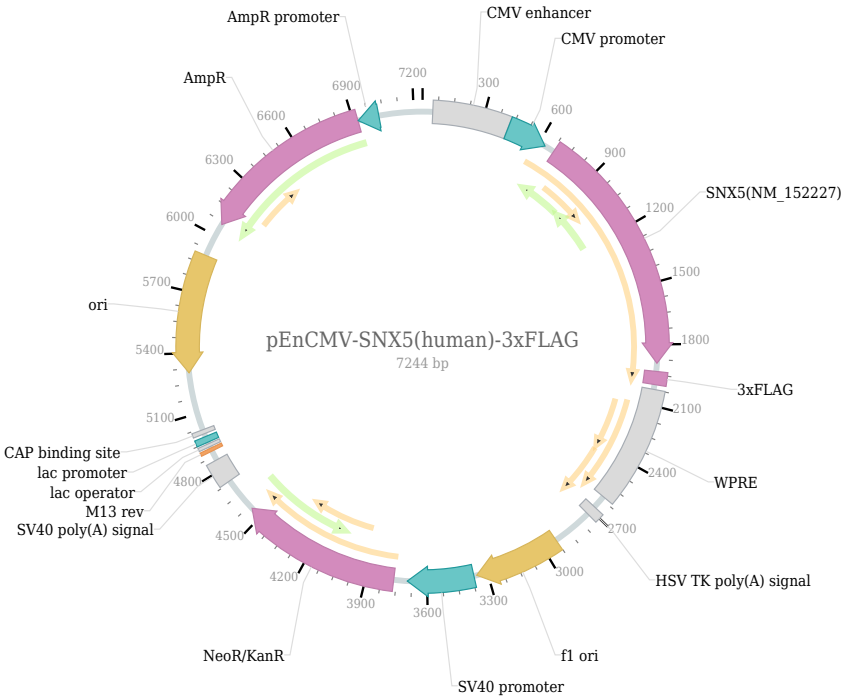

Plasmid Resuspension Protocol

1. Centrifuge at 5,000×g for 5 min.
2. Carefully open the tube and add sterile water to dissolve the DNA: add 20 µl for 5 µg plasmid, and 100 µl for 100 µg plasmid.
3. Close the tube and incubate for 10 minutes at room temperature.
4. Briefly vortex the tube and then do a quick spin to concentrate the liquid at the bottom. Speed is less than 5000×g.
5. Store the plasmid at -20 ℃.